



NITROGENATOR **EZ-2 & EZ-PRO**

REDESIGNED FROM THE GROUND UP TO IMPROVE USER EXPERIENCE



AUTO BACKUP CHANGEOVER

Save valuable gas by changing back over to gas created by the EZ as soon as possible, automatically.




ETL LISTED

Your safety is our priority. Tested by Edison Testing Laboratories and certified to comply with UL standards.




DIGITAL DISPLAY

Grants users and service technicians access to valuable information, and the ability to take action on alarms.



COMPACT ENCLOSURE

French Cleat included to simplify wall-mounting. Casters/legs available for under-counter use. Tank-mount option available.



MINIMAL SOUND & VIBRATION


Internal air compressor significantly reduces sound output. Dual isolation mounts minimize vibration.



RELIABLE DESIGN

With 30+ years of experience in the beverage industry, we prioritize service and reliability in the design phase.

NITROGENATOR **EZ-2 & EZ-PRO** DATA SHEET

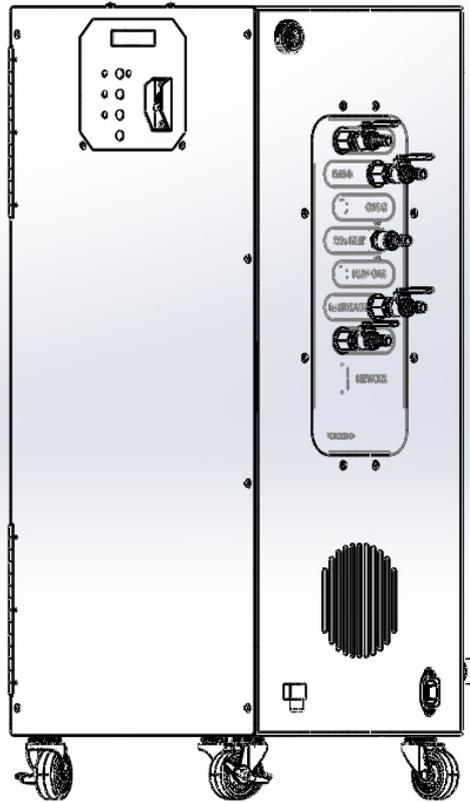

	EZ-2	EZ-PRO
Electrical	115V/60Hz/1PH NEMA 5-15P	
Power Consumption	5.8 amps	7.5 amps
Dimensions	14" W x 30" H x 12" D	
Weight	75lbs	90lbs
Mounting Options	Wall & Floor (must use leg/caster set if placed on floor)	
Output	7.5 SCFH	15 SCFH
Gas Purity	99.7% minimum	
Air Clearance	1" (back/bottom) & 4" (right side)	
CO2 Inlet Pressure	75-150 (min-max) PSIG	
Mixed Gas Outlet Pressure	60-65 PSIG	
N2 Storage Tank Options	12, 24 or 28 gallons (top-mount not available for 28gal)	
Ambient Temperature	40 - 95° F	
Noise Level	59 db (A)	69 db (A)
Tubing Connections	3/8" barbs (gas in/out) & 1/4" barb (condensate drain)	
Duty-Cycle	100% continuous for up to 12 hours*	

*All internal components designed for continuous, 100% duty-cycle. 12-hour run timer designed specifically to indicate user of any potential gas leaks downstream via audio-visual alarm.